



**DC/DC ATX 12V TYPE**

**Specification:**

- DC input Voltage:12V~24V ( 9V ~ 32V)
- Typical efficiency:  $\geq 75\%$  (Fully Loaded @ 12Vdc, 25°C)
- Low ripple & noise
- Short circuit protection
- Over load and Voltage protection
- Line regulation:  $\pm 1\%$  typical
- Load regulation:  $\pm 5\%$  typical
- Operating/storage Temp. 0°C~45°C / -40°C~ 50°C
- P/G signal delay: Power on 100~500mS; off >1mS.
- Isolation: 500Vdc. between primary and secondary.
- MTBF:100K Hrs typical, at 25°C
- EMC: regulation CE EMC, FCC part 15 class A
- Dimension: W81.5 x H40.8 x D150 mm (3.2" x 1.6" x 6")
- Cooling: 40 x 40 (mm) Fan
- Weight: : 1.03kg

**Output:**


Model	Input	Output min./max.A						Total Output Max. (W)
	VDC	+5V	+3.3V	+5V&3.3V W	+12V	-12V	+5VSB	
JDX57160I	12V ~24	0.2/14A	0.1/13A	80W	0.6/10A	0/0.3A	0/2A	160W
JDX57200I	12V~24	0.2/14A	0.1/13A	80W	0.6/14A	0/0.3A	0/2A	200W

**For cars, solar and battery power, marine vessels, vehicles**



DC/DC ATX 12V TYPE

### Mechanical Drawing:

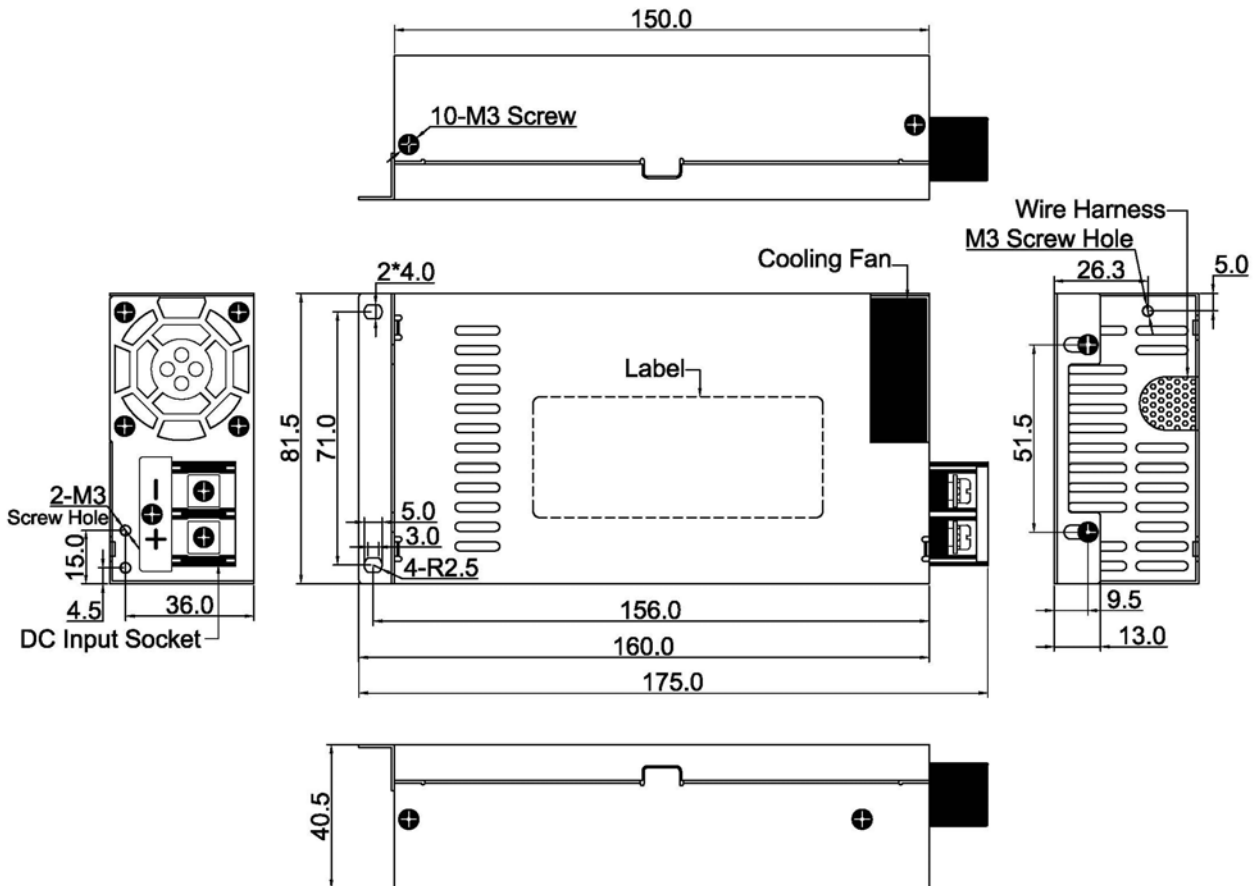

Inlet Socket:

40A/100V M4 screws with washers.

Hole diameter D=4mm.

